

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS/ISO 2631-2 (2003): Mechanical vibration and shock - Evaluation of human exposure to whole body vibration, Part 2: Vibration in buildings (1 Hz to 80 Hz) [MED 28: Mechanical Vibration and Shock]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



भारतीय मानक
याँत्रिक कंपन और शॉक — मानव के पूरे शरीर पर कंपन में
प्रभाव का मूल्यांकन
भाग 2 भवनों में कंपन (1 हर्टज़ से 80 हर्टज़)

Indian Standard
**MECHANICAL VIBRATION AND SHOCK —
EVALUATION OF HUMAN EXPOSURE TO WHOLE
BODY VIBRATION**

PART 2 VIBRATION IN BUILDINGS (1 Hz to 80 Hz)

ICS 13.160

© BIS 2007

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

September 2007

Price Group 6

NATIONAL FOREWORD

This Indian Standard (Part 2) which is identical with ISO 2631-2 : 2003 'Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration — Part 2: Vibration in buildings (1 Hz to 80 Hz)' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendation of the Mechanical Vibration and Shock Sectional Committee and approval of the Mechanical Engineering Division Council.

This standard supersedes IS 13276 (Part 2) : 1992 'Evaluation of human exposure to whole body vibration: Part 2 Continuous and shock-induced vibrations in buildings (1 Hz to 80 Hz)'.

The text of ISO Standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.
- b) Comma (,) has been used as a decimal marker in the International Standards, while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

In this adopted standard, reference appears to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards, which are to be substituted in their respective places, are listed below along with their degree of equivalence for the editions indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 2631-1 : 1997 Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration — Part 1: General requirements	IS 13276 (Part 1) : 2000 Mechanical vibration and shock — Evaluation of human exposure to whole body vibration: Part 1 General requirements (<i>first revision</i>)	Identical
ISO 8041 : 2005 Human response to vibration — Measuring instrumentation	IS/ISO 8041 : 2005 Human response to vibration — Measuring instrumentation	do

The technical committee has reviewed the provisions of following International Standard referred in this adopted standard and has decided that it is acceptable for use in conjunction with this standard:

<i>International Standard</i>	<i>Title</i>
IEC 61260 : 1995	Electroacoustics — Octave band and fractional-octave-band filters

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

Indian Standard

MECHANICAL VIBRATION AND SHOCK — EVALUATION OF HUMAN EXPOSURE TO WHOLE BODY VIBRATION

PART 2 VIBRATION IN BUILDINGS (1 Hz to 80 Hz)

1 Scope

This part of ISO 2631 concerns human exposure to whole-body vibration and shock in buildings with respect to the comfort and annoyance of the occupants. It specifies a method for measurement and evaluation, comprising the determination of the measurement direction and measurement location. It defines the frequency weighting W_m which is applicable in the frequency range 1 Hz to 80 Hz where the posture of an occupant does not need to be defined.

NOTE 1 The frequency weightings given in ISO 2631-1 can be used if the posture of the occupant is defined.

Whilst it is often the case that a building will be available for experimental investigation, many of the concepts contained within this part of ISO 2631 would apply equally to a building in the design process or where it will not be possible to gain access to an existing building. In these cases, reliance will have to be placed on the prediction of the building response by some means.

This part of ISO 2631 does not provide guidance on the likelihood of structural damage, which is discussed in ISO 4866. Further, it is not applicable to the evaluation of effects on human health and safety.

Acceptable magnitudes of vibration are not stated in this part of ISO 2631.

NOTE 2 At present it is not possible to give guidance on acceptable magnitudes of vibration until more information has been collected in accordance with this part of ISO 2631.

The mathematical definition of the frequency weighting W_m is given in Annex A. Guidelines for collecting data concerning complaints about building vibration are given in Annex B.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2631-1:1997, *Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration — Part 1: General requirements*

ISO 8041, *Human response to vibration — Measuring instrumentation*

IEC 61260:1995, *Electroacoustics — Octave-band and fractional-octave-band filters*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

evaluation

range of activities which includes survey, measurement, processing, ordering, characterization, rating and presentation of relevant data

3.2

building

static construction used for habitation or allocated to any other human activity, including offices, factories, hospitals, schools, day-care centres

3.3

work time

period of activity, or working hours, of the vibration source defined by the daily start and finish times

3.4

exposure time

period during which exposure to the vibration occurs

4 Measurement of building vibration

4.1 General

The general requirements for signal conditioning and the duration of measurement as specified in 5.4 and 5.5, respectively, of ISO 2631-1:1997 shall be followed.

4.2 Direction of measurement

The vibration shall be measured in all three orthogonal directions simultaneously. For this purpose, the directions of vibration are related to the structure rather than to the human body. The orientations of the structure-related x -, y - and z -axes shall be those for a standing person as given in ISO 2631-1.

4.3 Location of measurement

The evaluation with respect to human response shall be based solely on the expected occupation, the tasks performed by the occupants, and the expected freedom from disturbance. Each relevant place or room shall be assessed with respect to these criteria. The vibration shall be measured at that location in the room where the highest magnitude of the frequency-weighted vibration occurs, or as specifically directed, on a suitable surface of the building structure.

NOTE It may be necessary to take measurements at several locations in the building to determine the local variation of the vibration.

4.4 Frequency weighting

The vibration measured at the relevant location and in the three directions according to 4.2 and 4.3 shall be frequency weighted. This part of ISO 2631 (as well as ISO 2631-1) uses frequency-weighted acceleration to express the vibration magnitude.

It is recommended that the frequency weighting W_m according to Annex A be used irrespective of the measurement direction.

NOTE 1 The frequency weightings given in ISO 2631-1 can be used if the posture of the occupant is defined.

Annex A gives the exact definition of the frequency weighting W_m . The values given in Table A.1, applicable to vibration acceleration as the input quantity, are calculated using the true one-third-octave band mid-frequencies and include the band limitation between 1 Hz and 80 Hz. Figure A.1 shows the frequency weighting W_m in a schematic way.

NOTE 2 W_m was previously designated as W.B.combined.

4.5 Evaluation of vibration

4.5.1 Vibration measurement

Vibration values should be determined by application of the methods given in ISO 2631-1. The vibration axis with the highest frequency-weighted vibration magnitude should be identified, and values obtained in this direction used for the evaluation.

In order to allow different kinds of future evaluation, it is recommended, wherever practicable, to use a measurement technique which records vibration time histories unweighted at least within the frequency range 1 Hz to 80 Hz.

4.5.2 Categories of source

For an evaluation, it is useful to categorize the vibration according to the major types of source which have been found in practice to give rise to adverse comments. Different magnitudes of vibration may be acceptable for the different categories. To establish international consistency of approach, the following categories are defined:

- a) continuous or semi-continuous processes, e.g. industry;
- b) permanent intermittent activities, e.g. traffic;
- c) limited duration (non-permanent) activities, e.g. construction.

The categories have been selected to reflect the human perception of different vibration sources. They are not intended to be exclusive but to give guidance for the application of this part of ISO 2631.

4.6 Measuring instrumentation

The requirements for measuring instrumentation, including tolerances, as given in ISO 8041 shall be followed.

5 Human responses to building vibration

Experience in many countries has shown that adverse comments regarding building vibration in residential situations may arise from occupants of buildings when the vibration magnitudes are only slightly in excess of perception levels (see ISO 2631-1:1997, Annex C). In some cases complaints arise due to secondary effects associated with vibration, e.g. reradiated noise (see Annex B). In general, satisfactory magnitudes are likely to be related to general expectations and to economic, social and other environmental factors. They are not determined by factors such as short-term health hazards and working efficiency. Indeed, in practically all cases the magnitudes are such that fatigue directly induced by the motion is very unlikely.

Situations exist where significantly higher vibration magnitudes can be tolerated, particularly for temporary disturbances and transient events. Examples of this are construction projects. Any startle factor can be reduced by a proper programme of public relations which may include announcements such as warning signals and/or concerning regularity of occurrence. Only in extremely rare cases should it be necessary to consult the criterion "health" as given in ISO 2631-1. For situations in which vibration occurs over an extended period, long-term familiarization may give rise to a change in adverse comment thresholds.

Annex A (normative)

Mathematical definition of the frequency weighting W_m

The frequencies f_i ($i = 1$ to 3) are parameters of the transfer function determining the overall frequency weighting W_m . The transfer function, $H(p)$, is expressed as the product of three factors [high-pass filter $H_h(p)$, low-pass filter $H_l(p)$ and pure weighting function $H_t(p)$], as follows, where $\omega_i = 2\pi f_i$ and $p = j2\pi f$:

Band limiting (filter with second-order Butterworth characteristic; f_1 and f_2 are the corner frequencies):

a) High pass

$$H_h(p) = \frac{1}{1 + \sqrt{2} \omega_1 / p + (\omega_1 / p)^2} \quad (\text{A.1})$$

$$|H_h(p)| = \sqrt{\frac{f^4}{f^4 + f_1^4}} \quad (\text{A.2})$$

where $f_1 = 10^{-0,1} \text{ Hz} = 0,7943... \text{ Hz}$.

b) Low pass

$$H_l(p) = \frac{1}{1 + \sqrt{2} p / \omega_2 + (p / \omega_2)^2} \quad (\text{A.3})$$

$$|H_l(p)| = \sqrt{\frac{f_2^4}{f^4 + f_2^4}} \quad (\text{A.4})$$

where $f_2 = 100 \text{ Hz}$.

Pure frequency weighting (for acceleration as the input quantity):

$$H_t(p) = \frac{1}{1 + p / \omega_3} \quad (\text{A.5})$$

$$|H_t(p)| = \sqrt{\frac{f_3^2}{f^2 + f_3^2}} \quad (\text{A.6})$$

where

$$f_3 = \frac{1}{0,028 \times 2\pi} \text{ Hz} = 5,684... \text{ Hz}$$

The transfer function, $H(p)$, of the band-limited frequency weighting W_m is given by the product of the high-pass filter $H_h(p)$, the low-pass filter $H_l(p)$ and the pure weighting function $H_t(p)$:

$$H(p) = H_h(p) \cdot H_l(p) \cdot H_t(p) \quad (\text{A.7})$$

NOTE In the most common interpretation of this equation (in the frequency domain) it describes the modulus (magnitude) and phase in the form of a complex number as a function of the imaginary angular frequency $p = j2\pi f$. Sometimes the symbol s is used instead of p . Alternatively p may be interpreted as the variable of the Laplace transform.

The modulus (magnitude) $|H(p)|$ is shown schematically in Figure A.1 for illustration.

Values of the frequency weighting W_m in one-third-octave bands, calculated using the true mid-frequencies, frequency band limitation 1 Hz to 80 Hz included, are given in Table A.1 for acceleration as the input quantity.

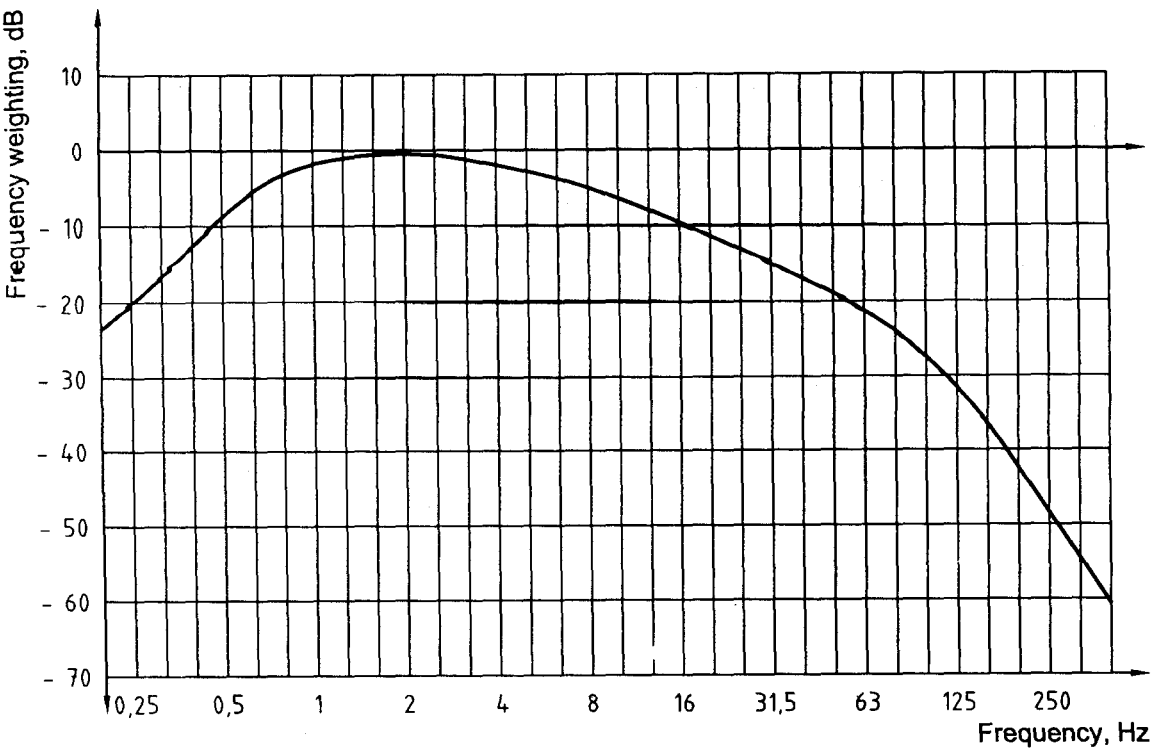


Figure A.1 — Frequency weighting W_m , with acceleration as the input quantity (schematic)

Table A.1 — Values of the frequency weighting W_m for acceleration as the input quantity
(in one-third-octave bands, calculated using the true mid-frequencies, band limitation 1 Hz to 80 Hz included)

x	Frequency, Hz		W_m	W_m
	Nominal	True	Factor	dB
−7	0,2	0,1995	0,0629	−24,02
−6	0,25	0,2512	0,0994	−20,05
−5	0,315	0,3162	0,156	−16,12
−4	0,4	0,3981	0,243	−12,29
−3	0,5	0,5012	0,368	−8,67
−2	0,63	0,6310	0,530	−5,51
−1	0,8	0,7943	0,700	−3,09
0	1	1,000	0,833	−1,59
1	1,25	1,259	0,907	−0,85
2	1,6	1,585	0,934	−0,59
3	2	1,995	0,932	−0,61
4	2,5	2,512	0,910	−0,82
5	3,15	3,162	0,872	−1,19
6	4	3,981	0,818	−1,74
7	5	5,012	0,750	−2,50
8	6,3	6,310	0,669	−3,49
9	8	7,943	0,582	−4,70
10	10	10,00	0,494	−6,12
11	12,5	12,59	0,411	−7,71
12	16	15,85	0,337	−9,44
13	20	19,95	0,274	−11,25
14	25	25,12	0,220	−13,14
15	31,5	31,62	0,176	−15,09
16	40	39,81	0,140	−17,10
17	50	50,12	0,109	−19,23
18	63	63,10	0,0834	−21,58
19	80	79,43	0,0604	−24,38
20	100	100,0	0,0401	−27,93
21	125	125,9	0,0241	−32,37
22	160	158,5	0,0133	−37,55
23	200	199,5	0,00694	−43,18
24	250	251,2	0,00354	−49,02
25	315	316,2	0,00179	−54,95
26	400	398,1	0,000899	−60,92
NOTE x is the frequency band number according to IEC 61260:1995.				

Annex B **(informative)**

Guidelines for collecting data concerning human response to building vibration

B.1 Introduction

The basic human response to vibration in buildings is adverse comment. The main body of this part of ISO 2631 concerns the measurement and the evaluation of whole-body vibration. This annex is intended to encourage users to collect data taking into consideration all of those parameters that affect human beings in buildings and which give rise to complaints.

Human response to vibration in buildings is very complex. In many circumstances the degree of annoyance and complaint cannot be explained directly by the magnitude of monitored vibration alone. Under some conditions of amplitude and frequency, claims may arise while measured whole-body vibration is lower than the perception level.

Analysis of these complaints shows that other parameters related to the vibration source (e.g. work time) or produced by the vibration in the exposure area (e.g. reradiated noise) may also give an explanation of the complaints.

Measured vibration parameters, complemented by the evaluation of these phenomena, allow better quantification of the degree of annoyance by vibration in buildings.

Vibration sources outside and inside buildings may generate whole-body vibration, together with the associated phenomena of structure-borne noise, airborne noise, rattling, movement of furniture and other objects, as well as visual effects (e.g. movement of hanging objects). To evaluate human complaints, all of these effects need to be considered.

The aim of collecting data for these associated phenomena is to facilitate the eventual definition of a more general indicator of the annoyance due to vibration. This indicator may be used as the basis to update future editions of this part of ISO 2631.

B.2 Parameters to be considered

B.2.1 General

The following factors should be considered and, where appropriate, recorded.

B.2.2 Parameters related to the source

The daily start and finish times of the activity of the vibration source during the period of measurement should be described in the report.

The total duration and the daily or weekly number of events, and the nature of the vibration, should also be noted, for example as:

- permanent source: day, night, or day and night;
- intermittent source: duration of events and number of events per day and/or night;
- isolated or infrequent source: event duration and number of events per day, week or month.

B.2.3 Parameters related to measured vibration

B.2.3.1 Vibration measurement

The place of measurement, the method of measurement and the weighting procedure should be applied in accordance with this part of ISO 2631.

B.2.3.2 Character of the vibration

Subjective response is also a function of the character of the vibration. The character can be defined according to the nature of the vibration that is measured, for example:

- vibration may be continuous, with magnitudes varying or remaining constant with time;
- vibration may be intermittent, with the magnitude of each event being either constant or varying with time;
- vibration may be impulsive, such as in shocks.

B.2.3.3 Exposure time

The exposure time of the people affected may also be important for the evaluation. Times of occupation of the building should be recorded.

The actual time and duration of the incident vibration should also be registered.

B.2.4 Associated phenomena

B.2.4.1 Structure-borne noise

A major phenomenon associated with vibration in buildings is structure-borne noise (also known as ground-borne noise) which may become audible as re-radiated noise. This noise is related to the vibration present.

Structure-borne noise should be measured at that location in the room where its effect is considered to be most disturbing. It may often be masked by ambient noise from other sources, making its unambiguous determination difficult. Evaluation of such noise should be performed in such a manner as to identify its nature and magnitude with respect to the ambient conditions.

B.2.4.2 Airborne noise

Airborne noise may be produced by and related to vibration and its sources. Noise measurement should be performed according to ISO 1996-1.

For the airborne noise level, consideration should be given to whether measurements should be performed when windows are opened or closed. Caution is necessary, since the windows may themselves be rattling, and their behaviour may change.

Low-frequency airborne noise can also be an issue in vibration-related complaints. Typical sources of this include elevated highways and railway bridges, and building air-handling systems. Care should be taken in the investigation to identify correctly the various sources of noise and to ensure the distinction between low-frequency noise and vibration.

B.2.4.3 Induced rattling

Effects such as the rattle of windows or ornaments may be due to vibration or to acoustic excitation. Their occurrence may emphasize the presence of vibration and should be reported.

B.2.4.4 Visual effects

In case of low-frequency vibration (< 5 Hz), visual effects may be observed, such as the swinging of suspended features. These factors may emphasize the disturbance and should also be reported.

B.3 Information to be reported

In addition to the measured vibration magnitude, information should be reported regarding the associated phenomena:

- measured noise level;
- visually observed phenomena;
- description of human complaints determined, for example, by questionnaire or interviews.

Bibliography

- [1] ISO 1996-1, *Acoustics — Description, measurement and assessment of environmental noise — Part 1: Basic quantities and assessment procedures*
- [2] ISO 4866, *Mechanical vibration and shock — Vibration of buildings — Guidelines for the measurement of vibrations and evaluation of their effects on buildings*
- [3] BS 6472, *Guide to evaluation of human exposure to vibration in buildings (1 Hz to 80 Hz)*
- [4] DIN 4150-2, *Erschütterungen im Bauwesen — Teil 2: Einwirkungen auf Menschen in Gebäuden (Vibrations in buildings — Part 2: Effects on persons in buildings)*
- [5] ERIKSSON, P.-E. Vibration of low-frequency floors: Dynamic forces and response prediction. *PhD thesis*, Chalmers University of Technology, Sweden, 1994
- [6] GAMBER, A. Probleme bei der Beurteilung der Wirkung stoßartiger horizontaler Schwingungen auf Menschen in Gebäuden. *Berichte der Landesanstalt für Umweltschutz Baden-Württemberg*, **1**, 1991, pp. 90-94
- [7] GRIFFIN, M.J. *Handbook of human vibration*. Academic Press, London, New York, 1996
- [8] GROß, E., NOTBOHM, G., ZIMMERMANN, P. and SPLITTGERBER, B. *Arbeitspsychologische Bewertung von Ganzkörperschwingungen; Experimentelle Untersuchungen zur Wirkung von mechanischen Schwingungen auf den Menschen*. Veröffentlichungen aus Lehre, angewandter Forschung und Weiterbildung, Fachhochschule Wiesbaden, 1991
- [9] HOWARTH, H.V.C. *A review of experimental investigations of the time dependency of subjective reaction to whole-body vibration*. United Kingdom Group on Human Response to Vibration, 1986
- [10] HOWARTH, H.V.C. and GRIFFIN, M.J. Subjective response to combined noise and vibration; summation and interaction effects. *Journal of Sound and Vibration*, 1990
- [11] HOWARTH, H.V.C. and GRIFFIN, M.J. The annoyance caused by simultaneous noise and vibration. *Journal of the Acoustical Society of America*, 1991
- [12] HUBBARD. Noise-induced house vibrations and human perception. *Noise Control Engineering Journal*, 1982
- [13] INNOCENT, P.R. and SANDOVER, J. *A pilot study of the effects of noise and vibration acting together; subjective assessment and task performance*. United Kingdom Group on Human Response to Vibration, Sheffield, 1972
- [14] JAKOBSEN. *Buildings: Vibration and shock, Evaluation of annoyance, Nordtest Method*, 1991
- [15] MELKE, J. *Durchführung von Immissionsprognosen für Schwingungs- und Körperschalleinwirkungen*. Landesanstalt für Immissionsschutz Nordrhein-Westfalen, Essen, 1992
- [16] MELONI, T., and KRUEGER, H. Wahrnehmung und Empfindung von kombinierten Belastungen durch Lärm und Vibration. *Zeitschrift für Lärmbekämpfung*, **37**, 1990, pp. 170-175
- [17] MIWA, T. and YONEKAWA, Y. Measurement and evaluation of environmental vibrations, Part 2: Interaction of sound and vibration. *Industrial Health*, **11**, 1973
- [18] MIWA, T., YONEKAWA, Y. and KANADA, K. Thresholds of perception of vibration in recumbent men. *Journal of the Acoustical Society of America*, **75**, 1984, pp. 849-854

- [19] OBORNE, D.J. Whole-body vibrations and international standard ISO 2631; a critique. *Human Factors*, **25** (1), 1983, pp. 55-69
- [20] OKADA, A. and KAJIKAWA, Y. Factors affecting the perception of low-level vibrations. *Eur. J. Appl. Occup. Physiol.*, **47** (2), 1981, pp. 151-157
- [21] PARSONS, K.C. and GRIFFIN, M.J. Whole-body vibration thresholds. *Journal of Sound and Vibration*, **121** (2), 1987
- [22] PAULSEN and KASTKA. *Effects of combined noise and vibration on annoyance*. Medical Institute of Environmental Hygiene at the Heinrich-Heine-University, Düsseldorf, 1994
- [23] RUFFELL, C.M. and GRIFFIN, M.J. Effect of 1 Hz and 2 Hz transient vertical vibration on discomfort. *Journal of the Acoustical Society of America*, **98** (4), 1995
- [24] SEIDEL, H. and HEIDE, R. Long-term effects of whole-body vibration; a critical survey of the literature. *International Archives of Occupational and Environmental Health*, **58** (1), 1986, pp. 1-26
- [25] SPLITTGERBER, H. *Whole-body vibration perception thresholds for some complex vibrations*. Institut National de Recherche et de Sécurité, Vandœuvre-les-Nancy, 1988
- [26] STARK, J., PEKKARINEN, J., PYYKKOE, I., AALTO, H. and TOPPILA, E. Transmission of vibration from support surface to human body in the evaluation of postural stability. *Journal of Low-Frequency Noise and Vibration*, **10** (1), 1991, p. 17
- [27] TANTAWY, T. *Investigation technique concernant les vibrations de l'être humain dans le bâtiment*. CERS, Research Reports for the Ministry of Environment, France, 1991
- [28] TANTAWY, T. *Investigation sur la détermination des paramètres de la gêne par vibrations dans les bâtiments*. CERS, Research reports for the Ministry of Environment, France, 1993
- [29] TANTAWY, T. *Investigation en vue de la quantification d'un indicateur de la gêne par vibrations de l'être humain dans le bâtiment*. CERS, Research Reports for the Ministry of Environment, France, 1994
- [30] WOODROOF, H.J. *Annoyance caused by railway-induced building vibration to residents living within 100 meters of railway lines in Scotland, UK*. United Kingdom Group on Human Response to Vibration, Derby, 1985
- [31] WOODROOF, H.J. and GRIFFIN, M.J. A survey of the effect of railway-induced building vibration on the community. *ISVR Technical Report*, No. 160, 1987
- [32] YAMADA, S., SUEKI, M., HAGIWARA, S., WATANABE, T. and KOSAKA, T. Psychological combined effects of low-frequency noise and vibration. *Journal of Low-Frequency Noise and Vibration*, **10** (4), 1991, pp. 130-136
- [33] YOKOYAMA, T., OSAKO, S. and YAMAMOTO, K. Temporary threshold shifts produced by exposure to vibration, noise and vibration plus noise. *Acta Otolaryng*, **78**, 1974, pp. 207-212

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act*, 1986 to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Catalogue' and 'Standards: Monthly Additions'.

This Indian Standard has been developed from Doc: No. MED 28 (0893).

Amendments Issued Since Publication

Amendment No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110 002
Telephones: 2323 0131, 2323 3375, 2323 9402 Website: www.bis.org.in

Regional Offices:

	Telephones
Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg NEW DELHI 110 002	{ 2323 7617 { 2323 3841
Eastern : 1/14, C.I.T. Scheme VII M, V.I.P. Road, Kankurgachi KOLKATA 700 054	{ 2337 8499, 2337 8561 { 2337 8626, 2337 9120
Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160 022	{ 260 3843 { 260 9285
Southern : C.I.T. Campus, IV Cross Road, CHENNAI 600 113	{ 2254 1216, 2254 1442 { 2254 2519, 2254 2315
Western : Manakalaya, E9 MIDC, Marol, Andheri (East) MUMBAI 400 093	{ 2832 9295, 2832 7858 { 2832 7891, 2832 7892

Branches: AHMEDABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR. LUCKNOW. NAGPUR. PARWANOO. PATNA. PUNE. RAJKOT. THIRUVANANTHAPURAM. VISAKHAPATNAM.